


PYTHON

150 ROUND VENT

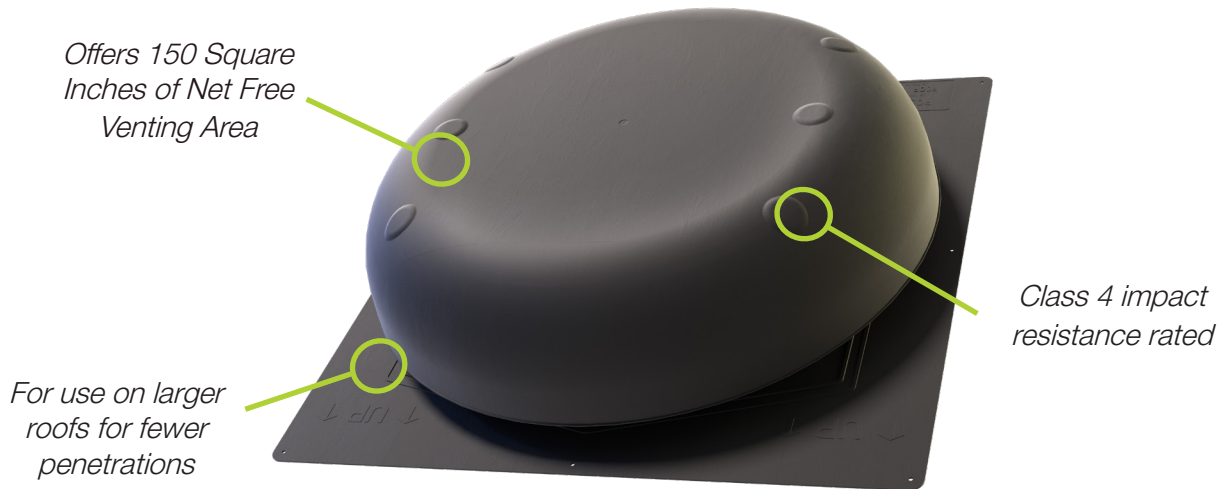

Python's patented 150 Round Vent is made from no-break polypropylene material.

- Python™ 150 Round Vent offers 150 square inches of Net Free Venting Area.
- Higher NFVA means fewer roof penetrations, 1/3 of typical 50 NFVA vents.
- Suitable for any pitch from 2/12 to 16/12.
- Virtually indestructible. No bending of flange or denting of dome.
- 26" x 26" size - easy to install.
- Requires a square cut out which is easier to cut on a roof.

- No sharp edges - safer to handle.
- Made of high impact Polypropylene with heat stabilizers and UV inhibitors throughout.
- Comes in three colors: Black, Brown, and Weatherwood
- Will not rust
- Green Product

Codes

- Texas Dept of Insurance (TDI) RV-124
- Florida Building Code - FL38735
- UL 2218 Class 4 impact (hail) resistant
- CSA approved

Attics need to breathe to keep cool and dry with proper ventilation.

- Reduces utility costs
- Prevents mold and mildew
- Extends shingle and roof deck life
- Eliminates damaging ice dams in winter
- Reduces air conditioning maintenance costs



Python Steep
Slope Ventilation
System

Weather-Tite™
Rolled Ridge Vent

3-IN-1 FlexFit
Ridge Vent

65 Slant
Back Vent

150 Round Vent

Value drives everything we do. That's why we developed the Python Steep Slope Ventilation Division. This comprehensive line of products offers easy installation, remarkable building ventilation, lower utility costs, extended shingle and roof deck life, extreme durability, and outstanding warranties. Get more quality, more performance, and more valuefrom Python™



Specs

Net Free Venting Area: 150 Square Inches of NFVA

Dimensions: Width 26" x Length 26" x Height 6.97"

Material: No-break polypropylene

Codes & Standards: TDI, FL Building Code, CSA

Passed: Florida TAS 100 (A) Wind & Water 110 mph

Colors: Black, Brown, Weatherwood

Roof Pitch: suitable for any pitch from 2/12 to 16/12

Patents: US Pat No. 7,544,124, US Pat No.

7,780,510, US Pat No. 10,415,252

Vent Weight: 4.34 lbs per piece

Pack Unit of Measurement: 1 per carton

Construction Detail: With heat stabilizers and UV inhibitors throughout

Durability: Will not dent or rust, UL 2218: Class 4 Impact Resistance



Easy Install

See our installation instructions online at MarcoIndustries.com

1. Locate the roof vents on the rear or side of the house evenly spaced on the width of the roof.
2. Mark the location of all roof vents before cutting holes. Center the holes between the rafters down at least two feet (24") from the peak of the roof.
3. Holes should be cut 17½" High x 15½" Wide. The Python™ 150 Round Vent box has a template for error proof installation. Using the template mark the outline for the hole on the roof. The hole in the roof cannot be larger than the hole in the bottom of the vent.
4. Shingle up until shingles cover the bottom of the hole. Cute the excess shingles away. Because shingles are part of a porous system applying an approved sealant around the edge of the hole is required.
5. The top of the Python™ 150 Round Vent has a molded in peak. Ensure that the vents are installed with the peak at the UP position.
6. Secure the vent base with a minimum of 8 galvanized nails. Nails should be a minimum of 1¼" long and must penetrate the vent, shingle, and decking. Secure a nail in the each corner of the vent flashing and along the middle of each side of the vent.
7. To seal the vent, use a plastic friendly roofing sealant. All nails must also receive a dab of sealant.
8. Shingle up and around the vent ensuring that the shingles butt up against the throat of the vent.
9. Pre-cut the top shingle to fit around the cricket of the vent and nail in place. Shingle up as normal to complete installation.



Roofing Ventilation & Accessories

800.800.8590 / MarcoIndustries.com